

# D-GUARD<sup>2</sup>S



## Digital Gas Detector with Sounder Strobe

Designed from the ground up to provide reliable, accurate and flexible gas detection, the D-Guard<sup>2</sup>S incorporates leading edge technology. From the basic design philosophy that includes functional safety compatible techniques, through to the advanced functionality that provides repeatable and dependable performance. D-Guard<sup>2</sup>S is powerful, yet simple to use, making it an ideal single solution detector with low ownership cost.

D-Guard<sup>2</sup>S offers a built in relay board with accompanying sounder strobe. This setup allows for a flexible onsite solution for a fixed monitoring and alarming combination without the need to run cabling back into controllers. This allows for a dramatically reduced system install and running cost.

Oxygen monitoring applications now benefit from the optional use of next generation 5 year life oxygen sensors, giving excellent dependability and further reducing system ownership costs.

Inclusion of HART communications enables access to a greater depth of information than is possible over a basic current loop signal. Real time gas readings, diagnostic information and sensor testing are available via the HART link. Remote current loop rescaling and test mode triggering is also possible via the HART link.

D-Guard<sup>2</sup>S includes a high resolution ultra-low power display with super clear text and graphics. The display offers visibility in low light spaces right through to use in direct sunlight. The user interface is intuitive and provides on screen guidance for carrying out calibration and configuration tasks.

Sensor temperature compensation results in long term stability, accuracy and reliability. D-Guard<sup>2</sup>S continually monitors the sensor temperature and applies corrections to both the zero operating point and the response to gas, allowing the detector to remain steady under zero gas conditions and accurate when measuring gas concentration.

Response time testing functionality is integral to D-Guard<sup>2</sup>S to give a true measurement of dynamic gas monitoring performance. As standards begin to emerge requiring such testing to be carried out, D-Guard<sup>2</sup>S is equipped to make the task simple.

D-Guard<sup>2</sup>S has been designed to efficiently allow the use of a single board to cover all detector types and ranges for toxic gases, oxygen, flammable gases and carbon dioxide. Configuration is simple and quick via the user interface which is accessed by the supplied magnetic stylus.

D-Guard<sup>2</sup>S is housed in a specialised highly impact resistant non-conductive plastic, static preventing enclosure, which is UV stable.



### KEY FEATURES

- Built in sounder strobe and relay board
- HART 7.0 communications
- Leading edge NDIR methane detection
- 5 year, O2 sensor option
- Wide range of toxic gases monitored
- Ultra - Clear high resolution display
- Display illumination
- Full sensor temperature compensation
- Integrated dynamic response testing
- Timed/HART triggered sensor self-test
- Continuous operating condition monitoring
- Non-intrusive setup and calibration
- Guided intuitive user interface
- Detector isolate feature
- High impact anti-static housing
- IP65 rated

# D-GUARD<sup>2</sup>S





## Sensor & 4-20mA Transmitter Specifications



### TYPICAL RANGE OF GASES DETECTED\*

Ammonia (NH <sub>3</sub> )	0 to 100 ppm in 1 ppm increments
Carbon Monoxide (CO)	0 to 100 ppm in 1 ppm increments
Carbon Dioxide (CO <sub>2</sub> )	0-1.5% v/v in 0.01% Vol increments
Chlorine (CL <sub>2</sub> )	0 to 10 ppm in 0.1 ppm increments
Ethylene Oxide (ETO)	0 to 20 ppm in 0.1 ppm increments
Hydrogen (H <sub>2</sub> )	0 to 100 ppm in 0.5 ppm increments
Hydrogen Cyanide (HCN)	0 to 50 ppm in 1 ppm increments
Hydrogen Sulfide (H <sub>2</sub> S)	0 to 200 ppm in 1 ppm increments
Hydrogen Chloride (HCL)	0 to 200 ppm in 1 ppm increments
Methane (CH <sub>4</sub> )	0-5% v/v /100% v/v in 0.01% or 1% increments
Methane (CH <sub>4</sub> )	0-100% LEL in 1% increments
Nitric Oxide (NO)	0 to 100 ppm in 1 ppm increments
Nitrogen Dioxide (NO <sub>2</sub> )	0 to 10 ppm in 0.1 ppm increments
Oxygen (O <sub>2</sub> )	0 to 25% in 0.1 %Vol increments
Ozone (O <sub>3</sub> )	0 to 2 ppm in 0.01 ppm increments
Phosphine (PH <sub>3</sub> )	0 to 1 ppm in 0.01 ppm increments
Sulfur Dioxide (SO <sub>2</sub> )	0 to 10 ppm in 0.1 ppm increments

\*Increased sensors and detection range available on request.

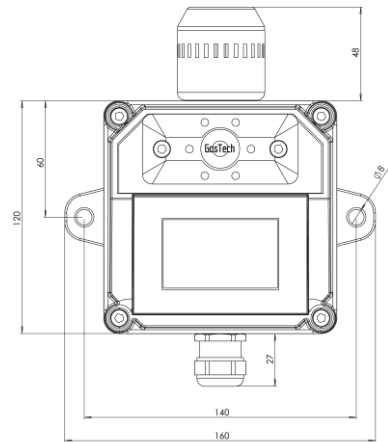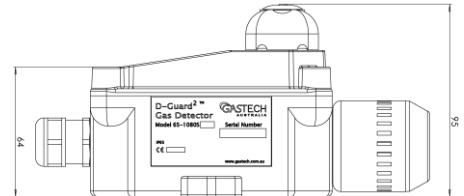

### SPECIFICATIONS

Analogue output	Two wire 4-20mA	Accuracy / Repeatability	Less than AS2290.3, ANZ60079.29 and AS4641
Digital Communication	HART 7.0 over two-wire loop	Sensor Style	4 series sized plug in sensors
Indication	400 x 240 pixel Graphical Back Light LCD display	Calibration	Non-intrusive, magnetic stylus
Relay Output 1	Low Alarm - Single Pole Double Throw (SPDT)	Drift	Less than 3% signal loss per year
Relay Output 2	High Alarm - Single Pole Double Throw (SPDT)	Dimensions	120mm x 120mm x 95mm
Relay Output 3	Fault - Normally Energised	Enclosure	Anti-static / UV stable chemical resistant Derlin
Input Power	10-30VDC	Sounder Strobe	98dB, flashing red
Response Time	Typical response T90 in less than 40 sec (Toxic) and less than 10 sec (CH <sub>4</sub> ), cell dependent	IP Rating	IP65
Operating Temperature	-20°C to +55°C	Warranty	2 Years on Instrument Sensor warranty varies with cell
Humidity Range	15-90% non-condensing	Part no.	65-1080S-xxx (xxx denotes gas type)



Int. Phone: +61 8 6108 0000  
Int. Fax: +61 8 9408 1868  
Email: [info@gastech.com.au](mailto:info@gastech.com.au)

[www.gastech.com.au](http://www.gastech.com.au)

HEAD OFFICE  
24 Baretta Road  
Wangara, WA 6065  
Phone +61 8 6108 0000

SYDNEY OFFICE  
21/25, Narabang Way  
Belrose NSW 2085  
Phone: +61 2 9451 0054

DISTRIBUTED BY: